

ProCapture-X

초고속 지문인식 단말기

ProCapture-X는 ZKTeco의 최신 지문인식 센서인 SilkiID가 탑재되어 있는 위조 지문 방지 기술이 적용된 지문인식 출입통제/근태관리 단말기입니다.

건조하거나 습한 상태의 모든 지문을 인식할 수 있으며, 생체 감지 기능으로 높은 보안성을 제공합니다.

뛰어난 터치감의 키패드와 함께 사용자친화적인 UI를 갖춘 스크린이 탑재되어 있습니다.

독립형 설치와 함께 표준 Wiegand 신호를 지원하는 타사 컨트롤러와 함께 연동 가능한 유연성을 제공하며, TCP/IP, RS485 등의 네트워크 인터페이스를 통해 다른 네트워크에 쉽고 편리하게 통합할 수 있습니다.

* 운영 소프트웨어: ZKBioSecurity / ZKAccess3.5

* ZKTeco의 Green Label 제품으로서, 3년의 무상 AS를 보증합니다.



ZKTeco



Features



모던 스타일 디자인 및 직관적인 UI



멀티 인증 모드 (지문/카드)






어떠한 상태의 지문도 완벽하게 인증



혁신적인 SilkID 지문센서 탑재





무선 네트워크 지원



Specifications (G: GL Exclusive Feature)

Capacity	Fingerprint: 20,000, Card: 50,000, Transaction: 500,000
Communication	TCP/IP, RS485 (For fingerprint&card Reader), USB Host, Wiegand Input / Output, Wi-Fi(Optional)
Access Control Interface	Lock Relay Output, Alarm Output / Auxiliary Input/ Exit Button / Door Sensor, Security Relay Box 1.2GHz High Speed CPU, Memory 128MB RAM / 256MB Flash, SilkID Fingerprint Sensor
Hardware	2.4 Inches TFT-LCD Screen, 125KHz EM Reader / Mifare (Optional), Hi-Fi Voice & Indicator, Tamper Switch Alarm, Touch Keypad, POE(Standard IEEE 802.3at), Wireless doorbell(Optional)
Standard Functions	Access Levels / Groups / Holidays/ DST / Bell Schedule, Duress Mode, Anti-Passback, Record Query, Custom Wallpaper & Screen Saver
Special Functions	Multiple Verification Modes, Alive Finger Detection, ZK Encrypted Card (Optional), Fingerprint Card (Optional)
Compatibility	Wiegand Slave Reader, RS485 FP Slave Reader, ZKBioSecurity Software
Additional Info	Working Temperature: 0°C - 45 °C, Dimensions: 200.5 × 88.5 × 28.7 mm Fingerprint Algorithm ZKFinger v10.0
Power	Operating Voltage 12V DC 3A, Current Draw < 500mA

Configuration Dimensions (mm)

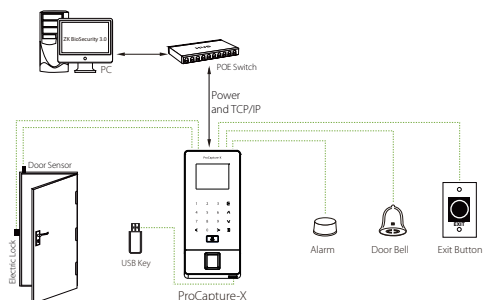

ZKTeco Korea
www.zkteco.kr
E-mail: ZKTECOKOREA1@ZKTECO-KOREA.COM



© Copyright 2018, ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.